



Technical Catalogue



FLG Series

Head Twin Screw Pump

Double head twin screw pump




S-LG series screw pump

Higher flow, higher pressure, double suction inlet, multi-task processing, multi-function bidirectional reversible operation, high and low viscosity, no pulse, containing granule and other materials without damage and flexible transportation solutions



Double head twin screw pump

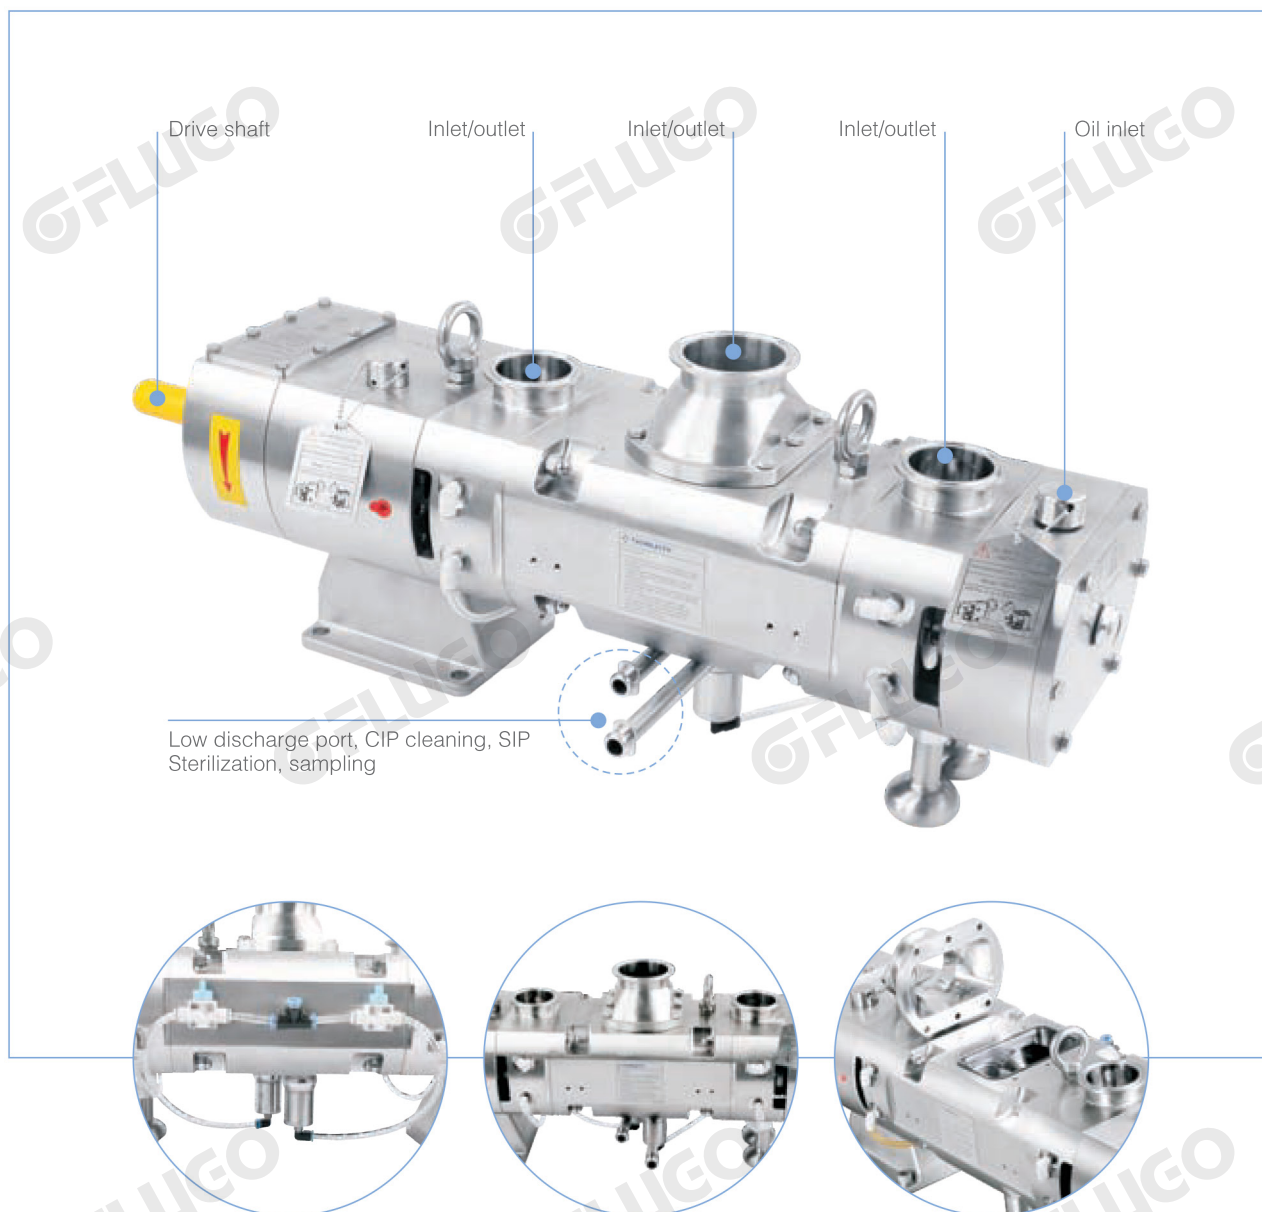


Technical Parameter Table of Screw Pump

Model	Screw pitch (mm)	Discharge per revolution (L/Rev)	Max flow (L/m)	Max flow (m ³ /h)	(rpm) Max speed (minutes)	Max diameter of passed granule (mm)	Max pressure (bar)	Head port (inlet)	Body port (outlet)	Net weight (kg)
FLG-20-18	18	0.14	280	17	2000	8.5	20	2.5"-DN65	2"-DN50	55
FLG-20-26	26	0.20	400	24	2000	12.5	20			
FLG-20-39	39	0.30	600	36	2000	19.0	20			



Double head twin screw pump with motor and reducer

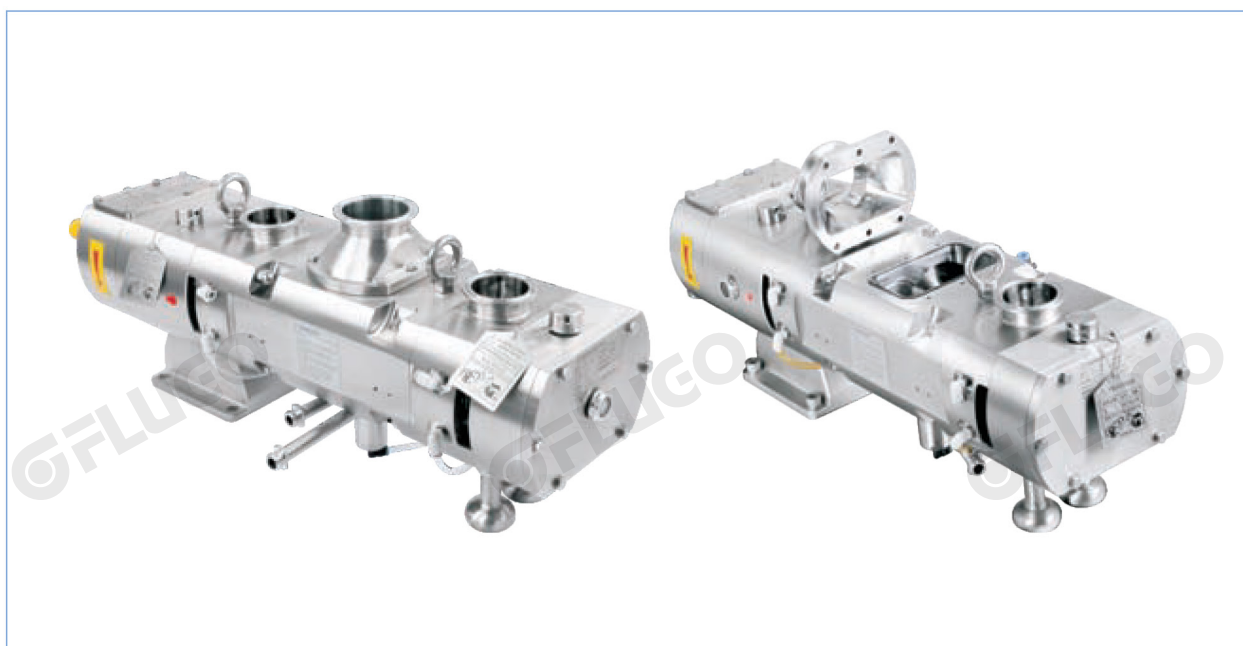



FLG Series - Head Twin Screw Pump

